



Architecture Lighting

Spot Light Series

CE RoHS IP 65



GNS-SL105

Product Characteristic :-

Body	: High quality extruded/cast aluminum with treatment of corrosion protection and UV-proof powder coating
Diffuser	: Clear tempered glass
Gasketing	: Thermostable silica gel to improve protection class
Fastener	: Stainless steel with high intensity and corrosion protection


Application :-

Urban streets, parks, squares, garden, villas and etc.

Technical Data :-

Insulation Class	: Class III								
Protection	: IP65								
Finishing Color	: <table><tr><td> WHITE, RAL 9010</td><td> GREY, RAL 9006</td><td> BLACK, RAL 9005</td><td> GREEN, RAL 6010</td></tr><tr><td> BLUE, RAL 5017</td><td> MAROON, RAL 3005</td><td> GOLD, RAL 1003</td><td></td></tr></table>	 WHITE, RAL 9010	 GREY, RAL 9006	 BLACK, RAL 9005	 GREEN, RAL 6010	 BLUE, RAL 5017	 MAROON, RAL 3005	 GOLD, RAL 1003	
 WHITE, RAL 9010	 GREY, RAL 9006	 BLACK, RAL 9005	 GREEN, RAL 6010						
 BLUE, RAL 5017	 MAROON, RAL 3005	 GOLD, RAL 1003							
	: Other RAL colors are available upon request.								

Dimensions (mm) :-

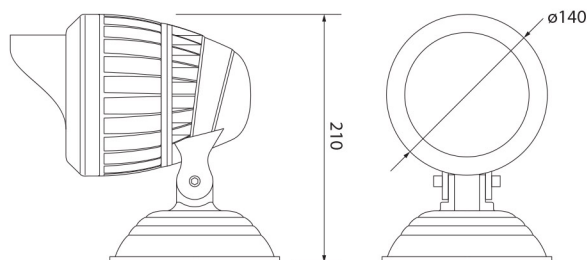

GNS-SL105

Specifications :-

Item No.	GNS-SL105
Power	20W
LED Type	High Power LED COB
Voltage	AC220V, 50/60Hz
Beam Angle	25°
Lumens	80lm/W
Color Temp.	3000K/4000K/6500K
Protection Class	IP65
Power Factor	0.95



GENESIS